

Server meet.netzwissen.de

meet.netzwissen.de. 86400 IN A 5.1.71.69

<https://portal.mars-services.de/>

Server meet2.netzwissen.de

- IP 95.216.202.7
- CPX31 RZ Helsinki

Jitsi Meet

Dokumentation und Architektur


The Handbook <https://jitsi.github.io/handbook/>

Entwickler Doku <https://desktop.jitsi.org/Documentation/DeveloperDocumentation>

Doku von Praveen Gupta <https://github.com/pvgupta24/Jitsi-Meet-Concepts/wiki/Jitsi-Architecture>

- XMPP Server: prosody.service
- Jitsi COncference FOCus: jicofo.service
- SIP Gateway: jigasi.service
- Jitsi Videobridge: jitsi-videobridge2.service

Netzwerk

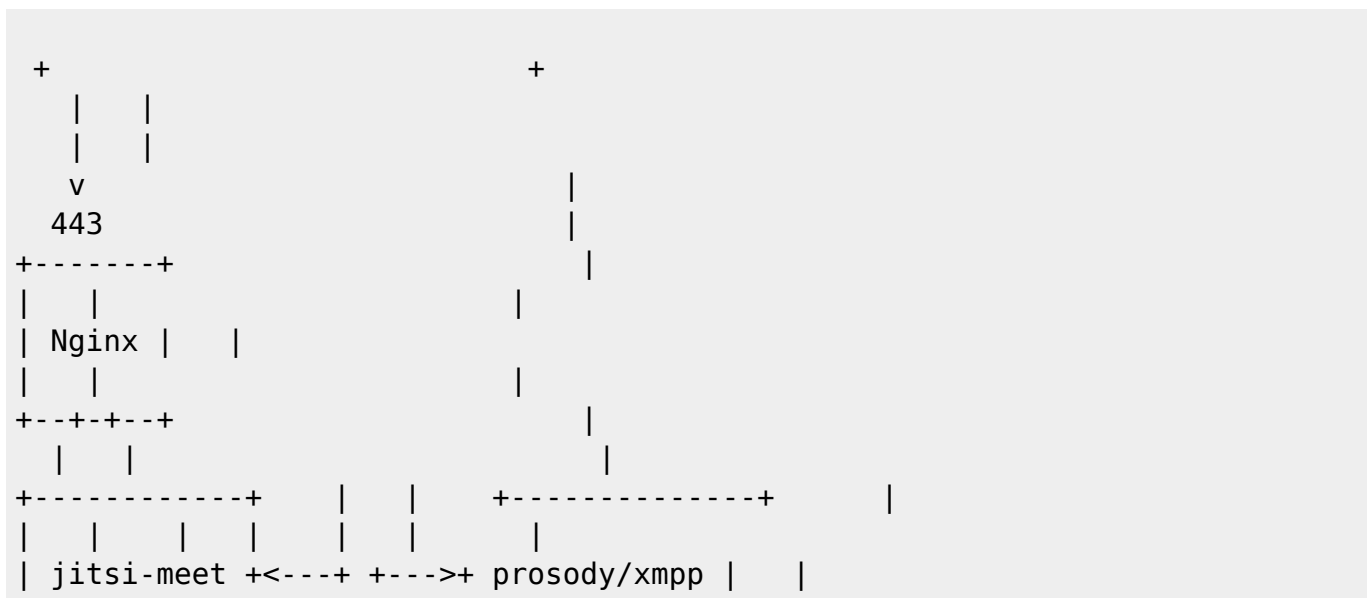

```

|   | files 5280 |   |   |
+-----+           +-----+           v
      5222,5347^   ^5347   4443,10000
+-----+   |   |   +-----+
|   |   |   |   |   |
| jicofo +-----^   ^-----+ videobridge |
|   |           |   |
+-----+           +-----+

```

Authentifikation aktivieren

In /etc/prosody/conf.avail/your_domain.cfg.lua

```
authentication = "anonymous"
```

ersetzen durch

```
authentication = "internal_plain"
```

und ergänzen mit

```
VirtualHost "guest.meet.netzwissen.de" authentication = "anonymous"
c2s_require_encryption = false
```

In /etc/jitsi/meet/meet.netzwissen.de.js:

```
anonymousdomain: 'guest.meet.netzwissen.de'
```

In etc/jitsi/jicofo/sip-communicator.properties neue Zeile

```
org.jitsi.jicofo.auth.URL=XMPP:meet.netzwissen.de
```

xmpp User anlegen. Mit diesem User werden neue Konferenzen erzeugt (nicht mehr anonym möglich!)

```
prosodyctl register admin meet.netzwissen.de [password]
```

Branding

In usr/share/jitsi-meet/interface_config.js

```
SHOW_BRAND_WATERMARK: true
```

Logo: add your logo to /usr/share/jitsi-meet/ as rightwatermark.png

<https://community.jitsi.org/t/change-text-on-initial-page-home/68260>

From:

<https://wiki.netzwissen.de/> - **netzwissen.de Wiki**

Permanent link:

https://wiki.netzwissen.de/doku.php?id=jitsi_admin&rev=1632484313

Last update: **17/08/2024 - 07:06**

